


# BR-1915P MOVING HEAD WASH 19X15

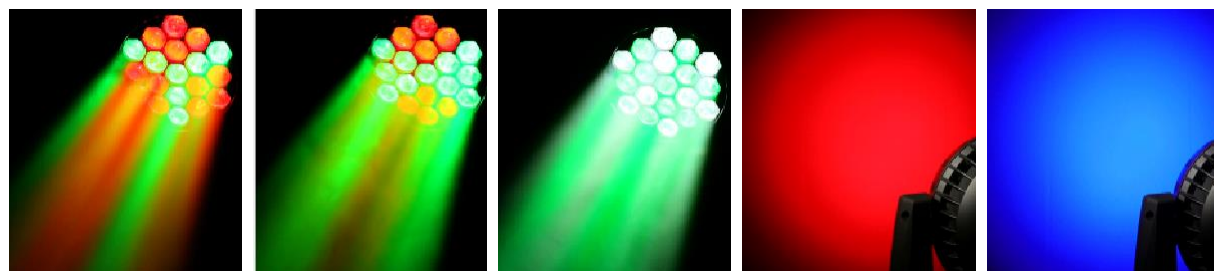


- SPECIFICATIONS:**
- 19\*15W 4-IN-1 RGBW LEDs
  - Input Voltage: AC90-260V 50/60Hz
  - Control Signal: DMX512, master-slave and sound activated or auto operation
  - Control Channel: 20/14/92/98MX channel modes
  - Power Consumption: 350W
  - Dimensions: 409(D)\*280(W)\*410(H)mm
  - Packing Dimensions: 500(D)\*340(W)\*600(H)mm
  - Net Weight: 11.2kg
  - Gross Weight: 14.3kg

- FEATURES:**
- Low power consumption
  - Specific optic lens of highly efficient elements integrated with glass tube
  - CTB and CTO, linear colour temperature 2700K-8000K changable
  - Each color and each LED controllable individually
  - Fast, smooth and quiet motorized zoom with 6° -60° angle
  - Even, soft edge and pure color mixing coverage
  - Flicker free sources management
  - 8/16 Bit smooth, fast and precise PAN/TILT movement
  - 630°/540°/360°PAN optional and 270°/180°/90°TILT optional
  - PAN/TILT reversible advantage
  - PAN/TILT calibration available
  - Scan position memory, auto reposition after unexpected movement
  - 0-100% Smooth linear LED dimmer
  - 7 built-in default programs for easy operation
  - Different Kinds of pre-programmed macro effects with variable speed
  - Variable speed strobe effect with 1-25 flashes per second
  - Variable pulse and random effects
  - Sound control with sensitivity adjustment
  - 2.4" TFT LCD display (320\*240pix) with 4 control buttons
  - LCD display switch-off automatically after 60 seconds
  - DMX signal monitoring indicator available
  - Lower noise and efficient FAN cooling system

- Constant temperature readout and management function
- Over heat protection management
- Powercon IN/ OUT with power switch and fuse
- 3-Pin DMX connectors IN/OUT
- DB rating@1M=54.18dB
- IP20 protection rating
- -35°C ~ 45°C max ambient temperature
- 2\*1/4 turn fastening Omega Clamps (Adaptable vertically and horizontally)
- 1\* Safety attachment point
- CE (EMC/LVD) and RoHS certified

**PHOTOMETRICS DIAGRAM:**

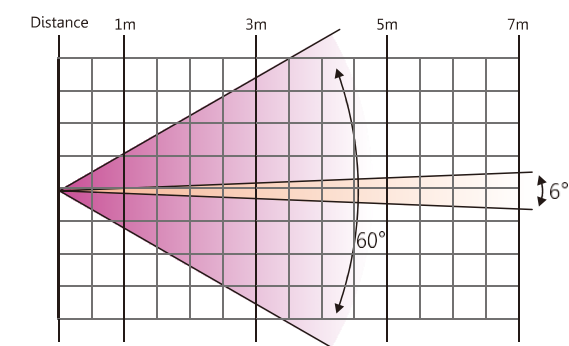

4° (LUX)	1m	3m	5m	7m
R	15719	4255	1691	920
G	25300	6095	2415	1265
B	35650	8050	3105	1610
W	28750	7015	2760	1530
RGBW	88550	25415	7820	5290

60° (LUX)	1m	3m	5m	7m
R	2185	368	207	
G	3220	460	253	
B	4255	644	258	
W	3680	517	245	
RGBW	10810	1380	529	

